



## PROGRAMMING ADAPTER SPECIFICATION

Item: 444801P600-YAM

Description: AS-44-48-01P-6YAM


## REPLACEMENT SOCKET: S-PCC-00-044-B

Call Emulation Technology for a

replacement socket price and delivery quote.

## **TYPICAL DIMENSIONS:**


Note: DIP base is .600" wide



All Dimensions in Inches.

(Assembly Drawing: F2294)

## **PACKAGE SPECIFICATIONS:**

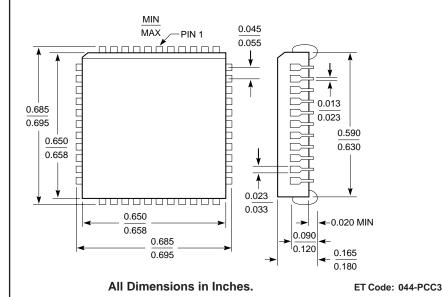

CON	NECTION	TABLE:

44-Lead PLCC SOCKET	PIN Names	48-Pin DIP <u>Base</u>
1	NC	
2	AR2	2
3	V <sub>CC</sub>	17
4	V CC D1	3
5	NC	<i>-</i>
6	AR3	5
7	AR3 AR4	6
8	AC3	7
9	NC NC	-
10	GND	11
11	PGM	12
12	V <sub>PP</sub>	13
13	VMARG	14
14	V <sub>CC</sub>	17
15	AC4	18
16	AC5	19
17	AR5	20
18	NC	-
19	D2	22
20	AR6	23
21	GND	24
22	AC6	25
23	NC	-
24	AR7	27
25	V <sub>CC</sub>	29
26	D3	30
27	NC	-
28	AR8	31
29	AC7	32
30	AC8	33
31	IDCLK	34
32	GND	35
33	IDENB	38
34	CLK	39
35	NC	-
36	$V_{CC}$	40
37	AC0	41
38	AC1	42
39	AR0	43
40	NC	-
41	D0	44
42	AR1	45
43	GND	35
44	AC2	46

**Note:** Pins 1, 4, 8, 9, 10, 15, 16, 21, 26, 28, 36, 37, 47, and 48 of the 48-Pin DIP Base are not used.

Compatible PLCC devices: Manufacturers: CY7C343 Cypress Altera

